

DYSO extreme uncoupling membrane interior and exterior areas



DYSO: is a flexible, uncoupling membrane designed for interior and exterior spaces. Created for installation under large-format ceramics and on floor heating. Maximum resistance to deformation, supporting cracks up to 20 mm. Optimal grip with the C2 S1/S2 tile adhesive. Guaranteed results.




DYSO membrane

1 mm 330 g/m²


anti-crack

conventional structure

conventional structure with underfloor heating

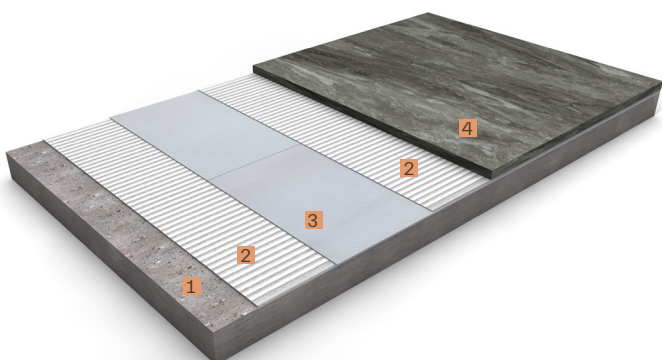

1. Structure
2. C2 S1/S2 tile adhesive
3. **DYSO** membrane
4. Covering

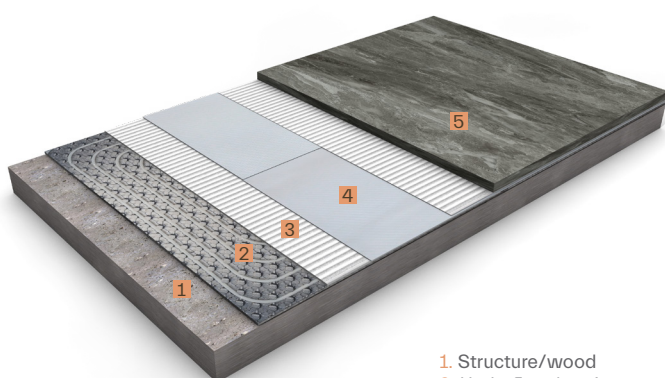

1. Structure/wood
2. Underfloor heating
3. C2 S1/S2 tile adhesive
4. **DYSO** membrane
5. Covering

DYSO



Flexible uncoupling membrane designed for interior and exterior spaces

reference	description	presentation
544017778	DYSO 30	Roll of 1,5 x 20 m (30m ²)
544016405	DYSO 15	Roll of 1,5 x 10 m (15m ²)
544017761	DYSO 7,5	Roll of 1,5 x 5 m (7,5m ²)

advantages

- Quick and easy installation.
- Reduces the tension transmission produced by structural movements from the support.
- Prevents cracked tile and grout.
- Specially designed for large format ceramic.

